



Datenblatt - Fiche technique - Data sheet

**11.04.5270**




ROLINE VGA-Kabel HD15 ST - ST mit Ferritkern, 20,0m

ROLINE HD15 M/HD15 M avec noyaux de ferrite, 20,0m

ROLINE HQ VGA Cable + Ferrite, HD15, M/M, 20 m

|              |        |
|--------------|--------|
| CUSTOMER NO: | REMARK |
|              |        |

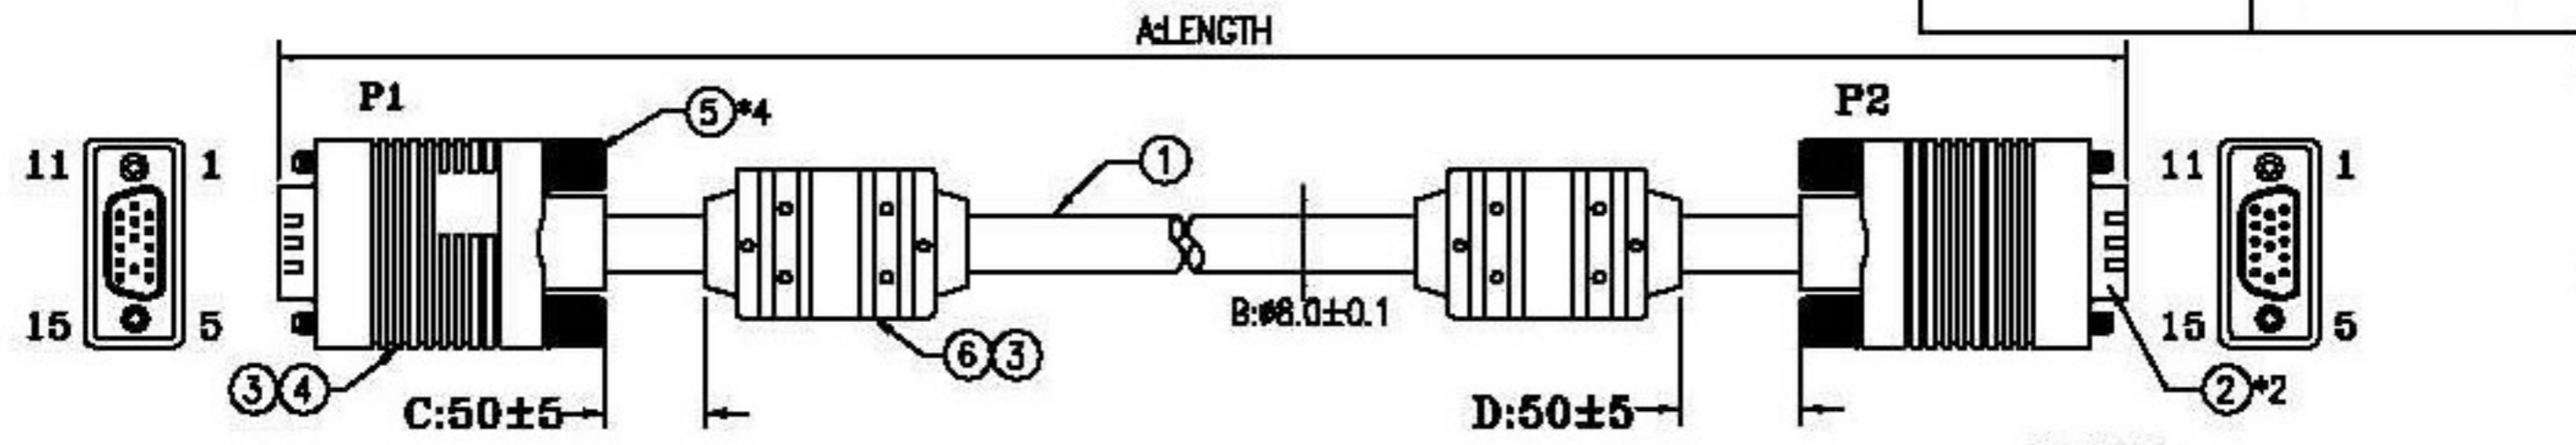


**NOTE:**

- 1) PRIMARY DIM:A,C,D
- 2) FULLY COPPER FOIL SHIELD 360°.
- 3) CABLE AND MODEL COLOR:BLACK
- 4) RoHS COMPLIANT

|    |  |
|----|--|
| 13 | NON UL PVC TUBE OD:2.3MM BLACK 6PCS RoHS                                 |
| 12 | UL HEAT SHRINK TUBE BLACK OD:1.5mm RoHS 6PCS                             |
| 11 | UL HEAT SHRINK TUBE BLACK OD:3.0mm RoHS 6PCS                             |
| 10 | SOLDER WIRE RoHS   |
| 9  | CABLE TIE BLACK 12cm RoHS  |
| 8  | COPPER W:0.024M RoHS 2PCS  |
| 7  | JUMP WIRE 24AWG 3CM RoHS   |
| 6  | FERRITE CORE #17.5X28.5X#9.5mm RoHS                                      |
| 5  | SCREW:#4-40UNC E:40.2MM BLACK(1101) RoHS                                 |
| 4  | INNER JACKET PE RoHS   |
| 3  | OUTER JACKET PVC 45Po BLACK(1101) RoHS                                   |
| 2  | HDB15M BLUE SOLDER TYPE TERMINAL PLATED GOLD FLASH W/O 9PIN RoHS         |
| 1  | UL2919 28#*3COAX+28#7C+AL+MY+B(1/65%)+D BALCK(1101) OD:8.0MM LENGTH RoHS |


**PINOUT:**

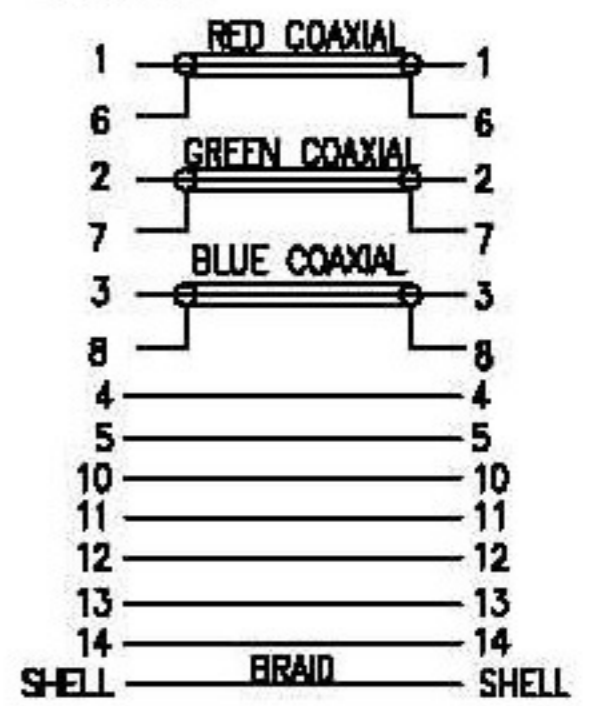

| A  | FIRST EDITION                               | He X.Lin                           | 18/04/09        |         |                  |         |                   |         |          |         |  |                              |  |
|--|---|------------------------------------|-----------------|---------|------------------|---------|-------------------|---------|----------|---------|--|------------------------------|--|
| REV. ECR   | DESCRIPTION                                 | C.N.                               | DATE            |         |                  |         |                   |         |          |         |  |                              |  |
| <p>THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF ROTRONIC CO. UNLESS SHOWN OTHERWISE, THEY SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ROTRONIC CO. PLEASE CONTACT ROTRONIC CO. FOR MORE INFORMATION.</p>  |   |                                    |                 |         |                  |         |                   |         |          |         |  |                              |  |
| <p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.</p>   |   | <p>TITLE: <b>MONITOR CABLE</b></p> |                 |         |                  |         |                   |         |          |         |  |                              |  |
| <table border="1"> <tr> <th>DIMENSION</th> <th>TOLERANCE</th> </tr> <tr> <td>0.01 TO 20.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>20.01 TO 50.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>50.01 TO 100.00mm</td> <td>±0.20mm</td> </tr> <tr> <td>100.01mm</td> <td>±0.30mm</td> </tr> </table> | DIMENSION                                   | TOLERANCE                          | 0.01 TO 20.00mm | ±0.10mm | 20.01 TO 50.00mm | ±0.15mm | 50.01 TO 100.00mm | ±0.20mm | 100.01mm | ±0.30mm | <p>DRWN: <b>He X.Lin</b></p> <p>CHK: <b>He X.Lin</b></p> <p>PROJ. NO: <b>W28SBK1MMXX</b></p> | <p>DATE: <b>18/04/09</b></p> |  |
| DIMENSION  | TOLERANCE                                   |                                    |                 |         |                  |         |                   |         |          |         |  |                              |  |
| 0.01 TO 20.00mm  | ±0.10mm                                     |                                    |                 |         |                  |         |                   |         |          |         |  |                              |  |
| 20.01 TO 50.00mm   | ±0.15mm                                     |                                    |                 |         |                  |         |                   |         |          |         |  |                              |  |
| 50.01 TO 100.00mm  | ±0.20mm                                     |                                    |                 |         |                  |         |                   |         |          |         |  |                              |  |
| 100.01mm   | ±0.30mm                                     |                                    |                 |         |                  |         |                   |         |          |         |  |                              |  |
| <p>MATERIAL: <b>W28SBK1MMXX</b></p> <p>FINISH: <b>1/2</b></p>  | <p>SIZE: <b>A4</b></p> <p>REV: <b>A</b></p> | <p>WFM-ED-07B</p>                  |                 |         |                  |         |                   |         |          |         |  |                              |  |

|              |        |
|--------------|--------|
| CUSTOMER NO: | REMARK |
|              |        |

| 客戶料號       | 長度(M) | 包裝方式                  | 紙箱尺寸  |       |       | 裝箱數量 |
|------------|-------|-----------------------|-------|-------|-------|------|
|            |       |                       | 高(cm) | 長(cm) | 寬(cm) |      |
| 11.04.5252 | 2.0   | 吊卡+PE袋(8"×10"×0.08mm) | 20    | 37    | 30    | 20   |
| 11.04.5253 | 3.0   | 吊卡+PE袋(8"×10"×0.08mm) | 17    | 46    | 30    | 20   |
| 11.04.5256 | 6.0   | 吊卡+PE袋(8"×10"×0.08mm) | 17    | 46    | 30    | 10   |
| 11.04.5260 | 10    | PE袋(9"×14"×0.08mm)    | 20    | 32.5  | 25    | 5    |
| 11.04.5270 | 20    | PE袋(12"×14"×0.08mm)   | 18    | 26    | 26    | 2    |
| 11.04.5280 | 30    | PE袋(14"×16"×0.08mm)   | 18.5  | 36.5  | 30    | 2    |

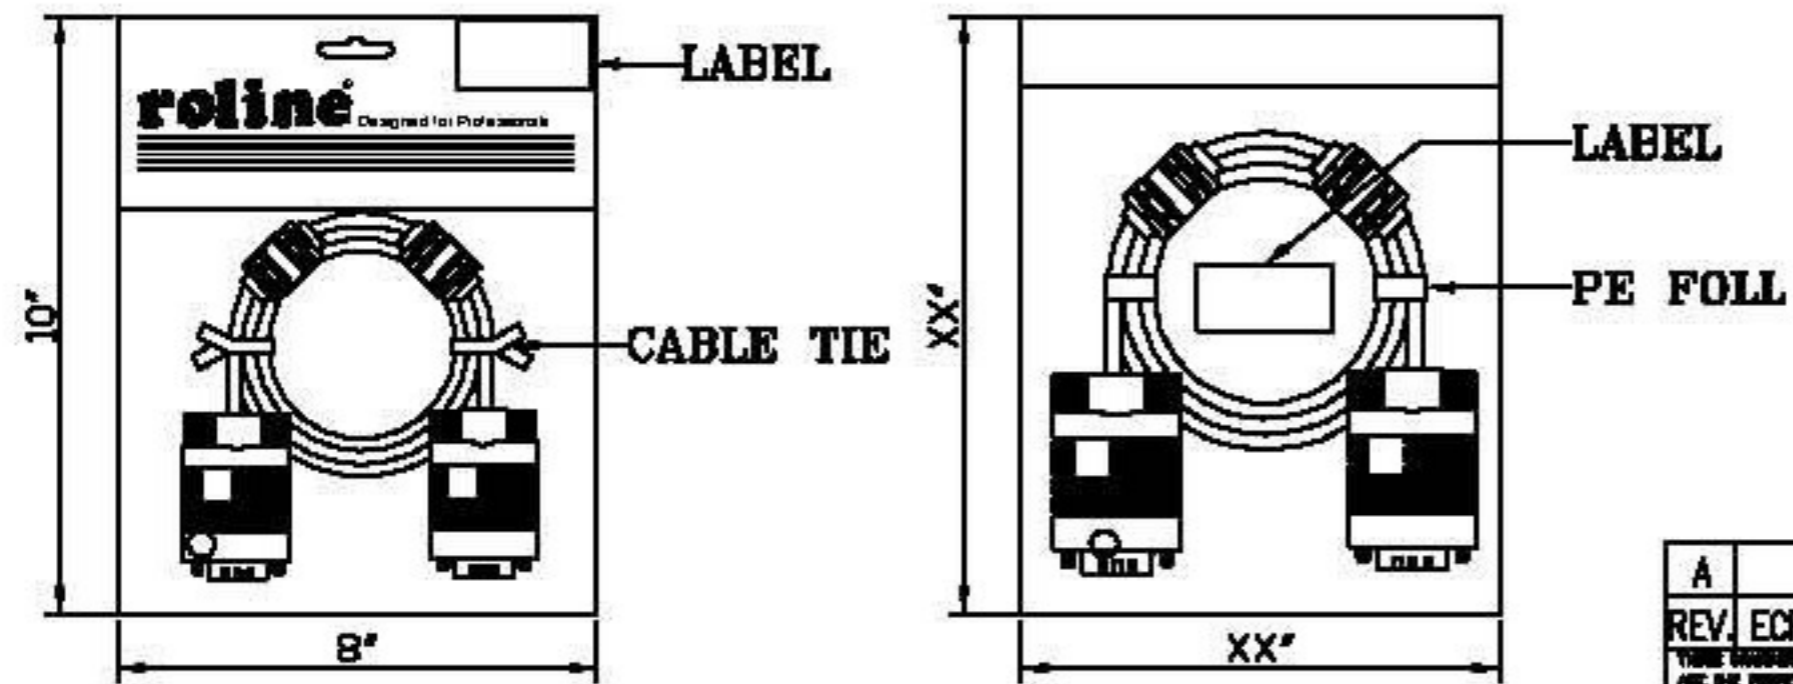

- NOTE:
- 1) 線材長度和PE BAG規格參表格.
  - 2) 貼紙由業務提供.
  - 3) 各長度的線材, 紙箱尺寸和裝箱數量參上表格.
  - 4) 產品符合RoHS標準.

|  |               |  |          |
|--|---------------|--|----------|
| A  | FIRST EDITION | He X.Lin                                       | 18/04/09 |
| REV. ECR   | DESCRIPTION   | C.N.   | DATE     |
| <small>THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF ROTRONIC CO. ANY REPRODUCTION OR USE BY ANY OTHER PARTY WITHOUT THE WRITTEN CONSENT OF ROTRONIC CO. IS STRICTLY PROHIBITED.</small> |               | <b>Rotronic Co., Ltd</b>                       |          |
| <small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND/OR DECIMALS THEREOF.</small>   |               | <b>MONITOR CABLE</b>                           |          |
| DIMENSIONS   | TOLERANCE     | DRWD.  | APP.     |
| 0.00 TO 25.00mm  | ±0.10mm       |  |          |
| 25.01 TO 50.00mm   | ±0.15mm       |  |          |
| 50.01 TO 100.00mm  | ±0.20mm       |  |          |
| 100.01mm   | ±0.25mm       |  |          |
| MATERIAL   |               | <b>W28SBK1MMXX</b>                             |          |
| FINISH   |               | SHEET <b>2/2</b> UNIT <b>MM</b> SIZE <b>A4</b> |          |